



WATER TRAILER INSULATED TEC IWT400



Cylindrical double wall insulated stainless steel,
400 gallon water tank with single axle trailer

- ✓ Robust design for on/off roads
- ✓ Exceptionally high build quality of tires and chassis

WATER TRAILER INSULATED - IWT400 EQUIPMENT DATA

Payload: 400 gallons-1514 liters

Material: Stainless Steel

Dimension (overall):

Height to top of manhole

Full: 2075mm

Empty: 2088mm

Length: 3853mm

Width: 2024mm

Drawbar Ring (adjustable):

1048/673mm


Weights

Payload max: 1570kg

Net Weight: Full 2765kg

Empty 1195kg

4 units of IWT400 can be loaded in a 40" container.

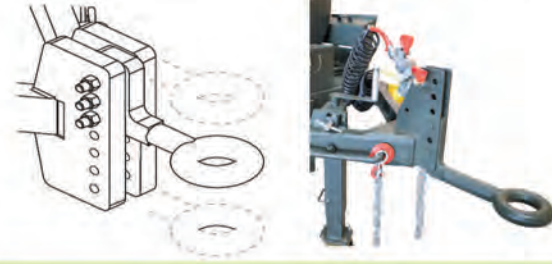

- Insulation: Polyurethane foam with 5 mm thickness between the two stainless steel walls
- Suitable with air transportation due to tie-down and lift points
- Able to be towed on highways at 80kmh and cross-country at 48kmh by 2 ½ ton or larger vehicles
- Wheels rim size: 17,5 x 6,75
Tire size: 235 x 75R 17,5 / Load index: 148J
- Axle: Capacity 4536kg with hydraulic brakes. Air brake axle is optional
- Equipped with mechanical, air over hydraulic, service and emergency system brakes.
- Adjustable Caster Assembly lifting capacity: 10.000kg
- Have composite type LED lighting at rear.
- Have a visible non-breakage level gauge
- Equipped with dispensing equipment consisting of five self closing faucets, an outlet with a cam-lock adapter, a self drain faucet and stainless steel piping.
- An insulated manhole, with stainless steel hinges



Please contact us for further information:

Tecimer Dış Ticaret Ltd.

4.Cadde 1325.Sokak 7/1

06460 Öveçler, Çankaya

Ankara/ Türkiye

Phone: +90 312 473 84 15

Fax: +90 312 473 84 17

ankara@tecimer.com

www.tecimer.com



Defence
Products